


# SPEC COM® LINK-PAC® MODULAR MECHANICAL SEAL

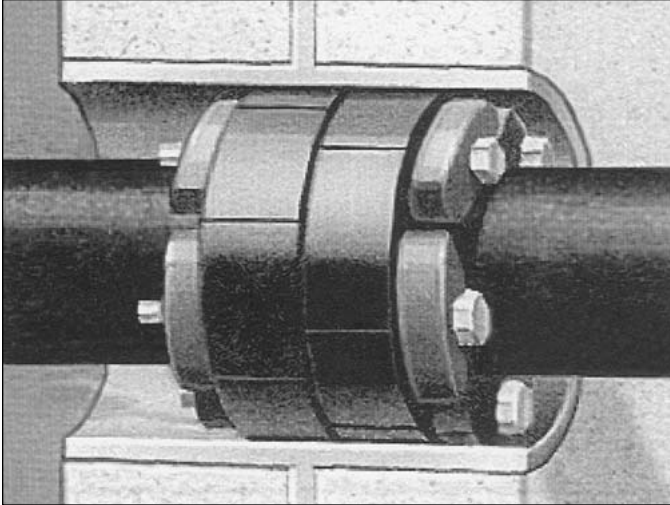

## Link-Pac®

For Sealing Annular Openings Created By Pipe Penetrations in Walls, Manholes, Structures and Casing Pipes.

- Fast, Easy to Install
- Reduces Labor Costs
- For Pipe Sizes 1/2"–72"
- Use With Core bit Drilled Holes or Pipe Sleeves
- Forms a Maintenance Free, Long Life Seal

**Link-Pac® saves time and money!**

Link-Pac® provides a fast easy way to seal the annular openings created when piping penetrates a wall. Labor costs are significantly reduced by eliminating the need for caulking, leading, flashing, tapping or mastics. There's no mess and no clean-up. Once installed, Link-Pac® provides a hydrostatic seal between the wall and pipe at 20 psig or forty feet of head, far higher than pressures usually encountered at wall penetrations. Link-Pac® can be installed directly into core bit drilled holes or with a **SPEC COM®** pipe sleeve. It is available for pipe sizes 1/2" through 72".

### Link-Pac® Selection Charts

Sizing Table for Standard Weight Steel, PVC and CPVC pipe

Nominal Pipe Size	Actual Pipe O.D.	Standard Weight Steel or PVC Pipe Sleeve*				Cast or core bit drilled hole*			Nominal Pipe Size	Actual Pipe O.D.	Standard Weight Steel or PVC Pipe Sleeve*				Cast or core bit drilled hole*		
		Sleeve Nominal Pipe Size	Sleeve Actual I.D.	Link-Pac Part No.	Number of links required	Hole I.D.	Link-Pac Part No.	Number of links required			Sleeve Nominal Pipe Size	Sleeve Actual I.D.	Link-Pac Part No.	Number of links required	Hole I.D.	Link-Pac Part No.	Number of links required
1/2"	0.840"	2"	2.067"	LP-200	4	2.0"	LP-200	4	14"	14.000"	18"	17.25"	LP-400	13	16.0"	LP-325	15
3/4"	1.050"	2-1/2"	2.469"	LP-275	5	2.5"	LP-275	5	16"	16.000"	20"	19.25"	LP-400	15	18.0"	LP-325	17
1"	1.315"	2-1/2"	2.469"	LP-200	5	3.0"	LP-300	4	18"	18.000"	24"	23.25"	LP-500	16	23.0"	LP-500	16
1-1/4"	1.660"	3"	3.068"	LP-275	7	3.0"	LP-275	7	20"	20.000"	24"	23.25"	LP-400	18	25.0"	LP-500	18
1-1/2"	1.900"	3-1/2"	3.548"	LP-300	5	3.5"	LP-300	5	22"	22.000"	26"	25.25"	LP-400	20	27.0"	LP-500	19
2"	2.375"	4"	4.026"	LP-300	6	4.0"	LP-300	6	24"	24.000"	30"	29.25"	LP-500	21	29.0"	LP-500	21
2-1/2"	2.875"	4"	4.026"	LP-200	9	4.0"	LP-200	9	26"	26.000"	30"	29.25"	LP-400	23	31.0"	LP-500	23
3"	3.500"	5"	5.047"	LP-300	8	5.0"	LP-300	8	28"	28.000"	34"	33.25"	LP-500	24	33.0"	LP-500	24
3-1/2"	4.000"	6"	6.065"	LP-325	5	6.0"	LP-325	5	30"	30.000"	36"	35.25"	LP-500	26	35.0"	LP-500	26
4"	4.500"	6"	6.065"	LP-300	10	6.0"	LP-300	10	32"	30.000"	38"	37.25"	LP-500	27	37.0"	LP-500	26
5"	5.563"	8"	7.981"	LP-425	6	8.0"	LP-425	6	34"	34.000"	40"	39.25"	LP-500	29	39.0"	LP-500	29
6"	6.625"	10"	10.02"	LP-475	10	10.0"	LP-475	10	36"	36.000"	42"	41.25"	LP-500	30	41.0"	LP-500	30
8"	8.625"	12"	12.00"	LP-475	12	12.0"	LP-475	12	42"	42.000"	48"	47.25"	LP-500	36	47.0"	LP-500	36
10"	10.750"	14"	13.25"	LP-425	10	14.0"	LP-400	10	48"	48.000"	54"	53.25"	LP-500	41	53.0"	LP-500	41
12"	12.750"	16"	15.25"	LP-425	12	16.0"	LP-400	12									

\*Minimum recommended sleeve length or wall thickness is 4" for Link-Pac® model 325 and smaller and 6" for models 400 and larger.