

MURDOCK HYDRANTS

COMPRESSION HYDRANT

M-75 3/4" M-100 1"

ANTI-FREEZING. Operating valves are buried below the frost line, easily removable without digging up the hydrant. Constructed of heavy red brass castings, premium quality gray iron and steel. Ideal for year-round service outside or in unheated buildings.

Inlet—Male I.P.S. threads;
Outlet—I.P.S. hose threads.

All 3/4" and 1" bottom connections can be furnished with I.P.S. tapping for connection to drain line.



SHIPPING WEIGHTS

Depth of Bury	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.
M-75—3/4"	30 lbs.	34 lbs.	38 lbs.	42 lbs.	46 lbs.
M-100—1"	35 lbs.	40 lbs.	45 lbs.	50 lbs.	55 lbs.


NOTE—In ordering, be sure to give depth of bury. Available in intermediate 1/2 foot and deeper buries.

STREET WASHER (Lawn Hydrant)

M-475 3/4" M-5100 1"

ANTI-FREEZING. For flush type hose outlet where vandalism or waste of water is a problem. These Patented Street Washers and Lawn Hydrants have a locking lid that prevents damage and water waste. The lock is simple, sturdy and effective—cannot be opened with screw-drivers. Same key operates both lid and water valve. Units have practically indestructible cast iron box, lid and plate plus brass working parts and black steel inner and outer pipes. All street washers can be furnished of other materials on special order.

DIMENSIONS. Top of box—overall: 3/4" size is 5-1/4" x 6-1/8"; 1" size is 5" x 7". In ordering, be careful to specify size and depth of bury. The depth of bury is from the top of street washer to center of supply outlet. Shortest possible bury—3/4" size is 8-1/2"; 1" size is 9". Prices for shorter buries are same as for 2 ft. bury. Intermediate buries available. 1" size can be furnished with 3/4" hose thread on outlet.

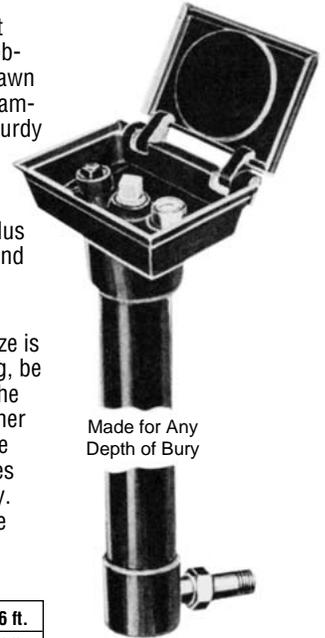

SHIPPING WEIGHTS

Depth of Bury	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.
M-475—3/4"	18 lbs.	22 lbs.	26 lbs.	30 lbs.	34 lbs.
M-5100—1"	25 lbs.	30 lbs.	35 lbs.	40 lbs.	45 lbs.

MURDOCK ANTI-FREEZING OUTDOOR FOUNTAINS

OUTDOOR DRINKING FOUNTAINS

M-30 3/4" M-34 3/4"

CHOICE OF TWO DESIGNS

M-30 and M-34 Drinking Fountains have same inner construction and roughing-in dimensions.

ANTI-FREEZING. Attractive, durable drinking fountain for any outdoor installation. Modern design constructed of bronze, brass and iron that will withstand the ravages of the weather and vandals. Bow, bubbler and mouth guard are solid bronze, chrome-plated; pedestal is heavy cast iron; operating pedal is steel. All internal working parts are brass except the main operating spring which is heavy Phosphor Bronze to retain its resiliency indefinitely. Self closing valve saves water. Side stream bubbler and mouth guard meet Sanitary Codes.

Automatic Stream Control. Equipped with a Flow Control Valve which automatically maintains the bubbler stream at the proper height without variation of pressures of 15 to 125 P.S.I.

Compact Complete Unit—No pit required for installation. Anti-freezing feature integral part of fountain. Trouble-free as it is possible to make an outdoor drinking fountain. Inner works are permanently assembled so that re-washing once a year is practically all the maintenance needed. Complete inner works are easily removed. The outside finish can be restored with a simple paint job.




"OCTAGON" DESIGN M-30

SHIPPING WEIGHTS

Depth of Bury	2 ft.	3 ft.	4 ft.	5 ft.	6 ft.
M-75—3/4"	30 lbs.	34 lbs.	38 lbs.	42 lbs.	46 lbs.
M-100—1"	35 lbs.	40 lbs.	45 lbs.	50 lbs.	55 lbs.

Specify depth of bury when ordering.

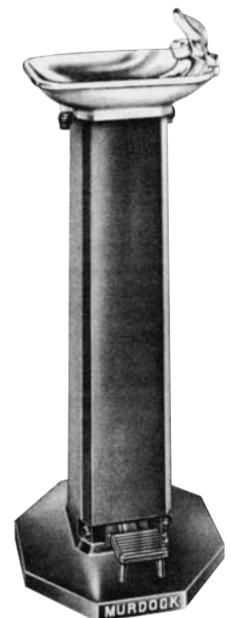

"SQUARE" DESIGN M-34