


### SUMNER PIPE BRACKETS

#### POSIFIX®

The Posifix is the smallest support particularly designed to fit between studs. Its application is to align and support hot and cold lines with waste piping in a lavatory or sink rough-in. The Posifix is pre-slotted to hold 1/2" or 3/4" supply pipe 4", 6" or 8" apart. The unit mounts on 1" through 1-1/2" waste pipe for perfect alignment.

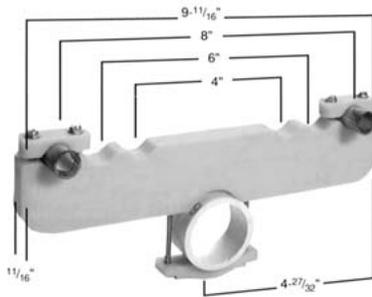


**STANDARD PACKAGE** includes two 1/2"–3/4" clamps, one 1"–1-1/2" clamp, and attaching screws. The Posifix comes in two material options; A-501 (Polystyrene—yellow) and A-601 (ABS—orange).

#### LOAD CAPACITY

4" Pipe centers	410 lb.
6" Pipe centers	325 lb.
8" Pipe centers	260 lb.

#### STAKFIX®

The Stakfix is used strictly inside of the chase and attaches to 1-3/8"–6-5/8" O.D. pipe vents or stacks by means of a stainless steel band similar to the Pipefix. The Stakfix has three mounting surfaces for supporting a combination of piping up to 1-1/2", running vertically and/or horizontally. The Stakfix also can be strapped onto metal struts or nailed to wood. Two to three-inch pipe can be supported on the Stakfix by using the U-bolts. The P-551 U-bolt is copper plated to prevent electrolysis. Smaller pipe can be mounted on the Stakfix, as well as using both styles of clamps.

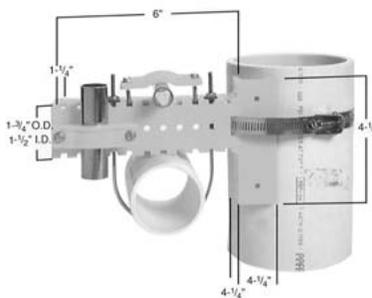

The Starfix comes in two material options: A-502 Polystyrene (yellow) and A-602 ABS (orange).

**STANDARD PACKAGE** includes one 7" Quik-Lok stainless steel band, three 1–1-1/2" clamps, attaching screws and P-556 clips.


**ECONOMY PACKAGE** includes one 5" continuous feed stainless steel band, tthree 1–1-1/2" clamps, attaching screws and P-556 clips.

#### LOAD CAPACITY

Outer End Point	125 lb.
Center Point	202 lb.
Innermost Point	357 lb.

#### PIPEFIX®

Similar to the Posifix, the Pipefix can be used in lavatory or sink rough-ins. The Pipefix application is similar to the Posifix in that it holds and aligns 1/2" and 3/4" supply lines with waste pipe, particularly in tight applications. Only 3-1/2" of wall clearance is required to mount the Pipefix. The support is pre-slotted to hold supply piping 4", 6" or 8" apart. The Pipefix attaches to 1-3/8" through 6-5/8" O.D. vent or waste piping by means of a stainless steel band.

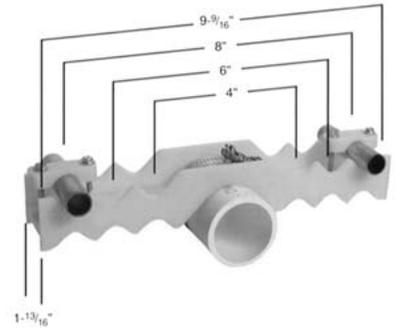

The Pipefix comes in two material options: A-503 Polystyrene (yellow) and A-603 ABS (orange).

**STANDARD PACKAGE** includes one 7" Quik-Lok stainless steel band, two 1/2–3/4" clamps and attaching screws.


**ECONOMY PACKAGE** includes one 5" continuous feed stainless steel band, two 1/2–3/4" clamps and attaching screws.

#### LOAD CAPACITY

4" Centers	782 lb.
6" Centers	185 lb.
8" Centers	145 lb.

#### CHANNEL

Channel comes in 7-foot lengths and is sized to fit over the strut as an isolator. The Channel fits as well over the Stakfix to be used as an extension; or with two Stakfix mounted opposite each other it can be used as a bridge. It may be fastened to cement walls to support pipe running either vertically or horizontally, or it can be fastened to studs for supporting shower head piping or other applications. It can be used as well as a strut for supporting small diameter overhead piping.

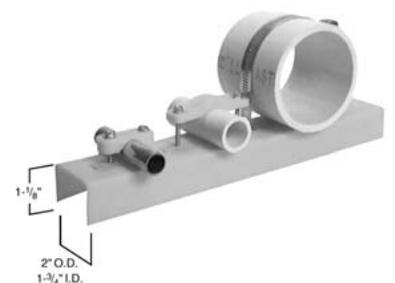

**STANDARD** A-507 and A-607 Channel is 1-1/8" x 2" x 7" and comes with holes and slots for use with the P-552 stainless steel band and/or the 1/2"–3/4" or 1"–1-1/2" clamps.

The Channel comes in two material options; A-507 (Polystyrene—yellow) and A-607 (ABS—orange).

#### LOAD CAPACITY

Load Applied to Centerline	230 lb.
Load Applied @ 4" Center	385 lb.
Load Applied @ 8" Center	1,062 lb.