





**WATER SERVICE**

**ANTI-SIPHON FREEZELESS WALL HYDRANTS**  
**MODEL 65/B65**

*For Non-Freezing Areas Only*

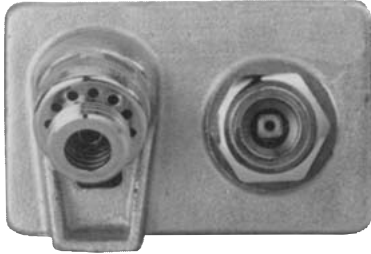

MODEL 65 Exterior Finish: Standard-Chrome (CH) Optional-Brass (BR) Polished Brass (PB)

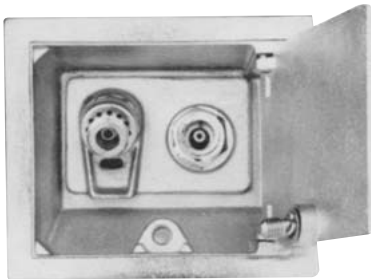

MODEL B65 Exterior Finish: Box & Door Standard-Chrome (CH) Optional-Brass (BR) Polished Brass (PB) Other Options: Anodized or Powder Coated Aluminum Box

The Model 65 and B65 are automatic draining, freezeless wall hydrants with anti-siphon vacuum breakers. The Model B65 is enclosed in a flush mounted wall box. Both models are designed to blend in with modern architecture for installation on restaurants, schools, office buildings, churches, apartments, motels, stores, shopping centers and industrial buildings.

**SPECIFICATIONS:**

MODEL 65/B65—Approved under ASSE Standard 1019-B and listed by IAPMO®. Meets Government Specification WW-P-541b Type 205.


VACUUM BREAKER—ANTI-SIPHON-NIDEL® Model 34HA with 3/4 inch male hose thread, approved under ASSE Standard 1011, Canadian Standards Association and listed by IAPMO®.

**ANTI-SIPHON WALL FAUCETS**  
**MODEL 24/B24/Y24**

*For Non-Freezing Areas Only*



MODEL 24 Exterior Finish: Standard-Chrome (CH) Optional-Rough Brass (BR) or Polished Chrome (PC)




MODEL B24 Exterior Finish: Standard-Chrome (CH) Optional-Rough Brass (BR) Other Options: Anodized or Powder Coated Aluminum Box




MODEL Y24 Exterior Finish: Standard-Chrome (CH) Optional-Rough Brass (BR) Other Options: Anodized or Powder Coated Aluminum Box

The Model 24 and B24 are automatic draining, wall faucets with anti-siphon vacuum breakers. The Model B24 is enclosed in a flush mounted wall box. Both models are designed to blend in with modern architecture in mild climate areas for installation on homes, service stations, churches, motels, drive-in restaurants, etc. The Model Y24 is designed to be used on a stand pipe in the lawn and garden, etc.


**Inlet Descriptions**




P Inlet  
 3/4" Female  
 Pipe Thread



C Inlet  
 3/4" Copper  
 Water Tube



P1 Inlet  
 1" Male  
 Pipe Thread




EP Inlet  
 Union Elbow  
 With 3/4" Male  
 Pipe Thread




## WATER SERVICE

### FREEZELESS HOT & COLD WALL FAUCET MODEL 22/V22


### BACKFLOW PROTECTED AUTOMATIC DRAINING FREEZELESS WALL FAUCET MODEL 27

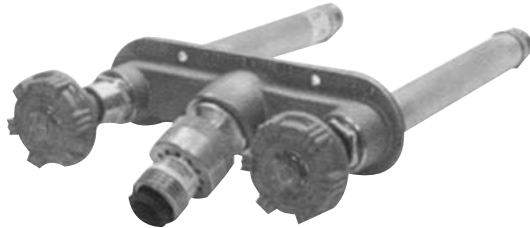

Model 22



Model V22

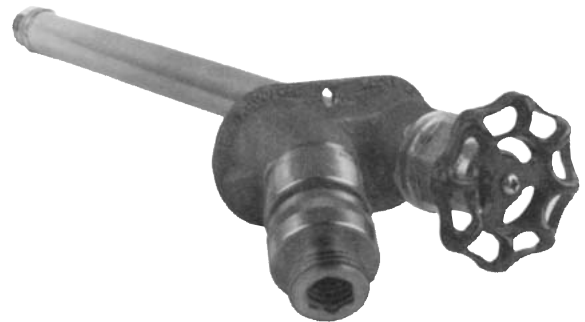

The Model 27 faucet drains as handle is shut off even if hose is attached. This faucet is designed for residential outside water service applications.

#### SPECIFICATIONS:

#### HOSE CONNECTION BACKFLOW PREVENTER—

- NIDEL® Model 37HA with 3/4 inch male hose thread
- ASSE Standard 1052 approved
- IAPMO® listed
- Field Testable
- Two check valves
- No siphon-back with pressurized hose

This unit offers anti-siphon protection only. The Woodford Model 22 is designed to provide year-round hot and cold water service regardless of outside temperature. Separate hot and cold inlet tubes and operating handles allow for manually operated water temperature control.

#### Available in three models:

- Model 22 Horizontal Mount-Rough Brass
- Model V22 Vertical Mount-Rough Brass  
For slab construction
- Model 22CC Close Coupled-Rough Brass  
For use in non-freeze areas-Fits within 2" x 4" wall


Wall Thickness (inches)

CC	4	6	8	10	12	14	16	18	20	22	24
2.4	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.2	4.4	4.6	4.8

Shipping Wt. Ea. Lbs.

\*Overall Length Dimension: Add wall thickness and inlet option length shown in chart below. Overall length for Model 22CC (Close Coupled) is 2-3/4".

#### Rough-In Dimensions

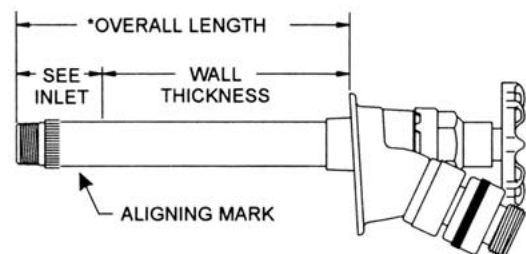

#### Inlet Descriptions

C Inlet Combination  
Copper Water Tube  
1/2" K, L or M Inside  
3/4" M Only Outside

CP Inlet  
Combination  
1/2" Male Pipe Thread  
1/2" Female Copper Water Tube

P Inlet  
Combination  
1/2" Female Pipe Fitting  
3/4" Male Pipe Thread

PX Inlet  
1/2" PEX  
Tube Fitting

C1 Inlet 1/2" Female  
Sweat Fitting  
22 Close Coupled  
Only



**WATER SERVICE**

**FREEZELESS WALL FAUCET  
 MODEL 14 / 14CC**



**ANTI-SIPHON FREEZELESS WALL FAUCET  
 MODEL 17 / 17CC**



This unit offers no anti-siphon or backflow protection.

The Woodford Model 14 drains as handle is shut off and hose is removed. This faucet is designed for residential outside water service applications.


The Model 14CC is designed for use in non-freeze areas and fits within 2" x 4" stud wall. The 14CC is available with C inlet only.

This unit offers anti-siphon protection.

The Woodford Model 17 drains as handle is shut off and hose is removed. This faucet is designed for residential outside water service applications.

The Model 17CC is designed for use in non-freeze areas and fits within 2" x 4" stud wall. The 17CC is available with C Inlet only.

**Rough-In Dimensions**

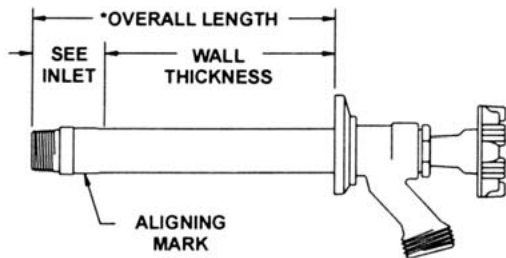


Wall Thickness (inches)

CC	4	6	8	10	12	14	16	18	20	22	24
1.0	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2	2.1	2.2

Shipping Wt. Ea. Lbs.

\*Overall Length Dimension: Add wall thickness and inlet option length shown in chart below. *Overall length for 14CC is 2-7/8.*

**Rough-In Dimensions**

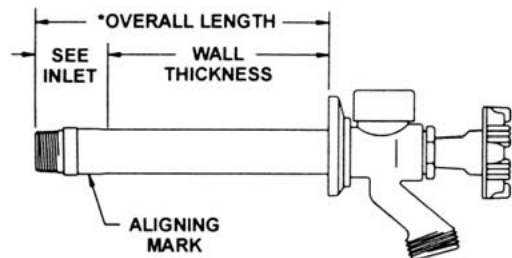

Wall Thickness (inches)

CC	4	6	8	10	12	14	16	18	20	22	24
1.0	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2	2.1	2.2

Shipping Wt. Ea. Lbs.

\*Overall Length Dimension: Add wall thickness and inlet option length shown in chart below. *Overall length for 17CC is 2-7/8.*

**Inlet Descriptions**

